

GEARLUBE EP 75W90

Semi-synthetic gear oil

This gear oil is a semi-synthetic lubricating oil for mechanical transmissions, formulated with high quality special refined and synthetic base oils and special EP-additives to obtain the following properties:


- excellent resistance against oxidation
- a very high activity against wear, corrosion and foam
- a low pour point
- very good EP-properties
- fuel economy

Applications

This gear oil is used in hypoid differentials under very heavy duty conditions and should be used in all transmissions that require EP-transmission oils.

Performance Level

API: GL-5
MT-1
SCANIA: STO 1.0
SAE: J2360
ZF TE-ML 02B ,05B, 07A, 08, 12B, 16F, 17B, 19C, 21B
MB 235.8
MACK GO-J
MAN 341Z2, 341 E3, 342 M3
IVECO AXLES
VOITH 3.325-340
MIL-L-2105E
ARVIN MARITOR O-76N
TMS-6816

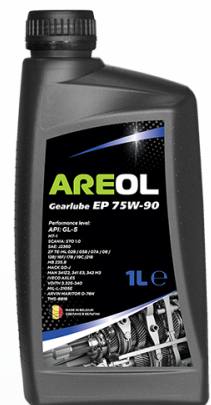

Specifications:

Density at 15 °C, kg/l	0,882
Viscosity 40 °C, mm ² /s	87,90
Viscosity 100 °C, mm ² /s	15,20
Viscosity Index	184
Flash Point COC, °C	200
Pour Point, °C	-42