

# GEARLUBE EP 80W-90

## Mineral gear oil

This is an extreme-pressure lubricant for gear boxes, specifically formulated to satisfy the highest service conditions: high speed, shockloads and high torque at low speeds.

## Applications:

Recommended for all hypoid transmissions and also suitable for spiral bevel gears, worm wheels and most transaxles.

## Performance Level

API: GL-5

MAN: 342 M-1

MAN: 342 M-2

MIL: MIL-L-2105 C

MIL: MIL-L-2105 D

MB 235.0

ZF: TE-ML 05A

ZF: TE-ML 07A

ZF: TE-ML 16B

ZF: TE-ML 17B


ZF: TE-ML 19B

ZF: TE-ML 16C

ZF: TE-ML 12E

ZF: TE-ML 12M

ZF: TE-ML 12N

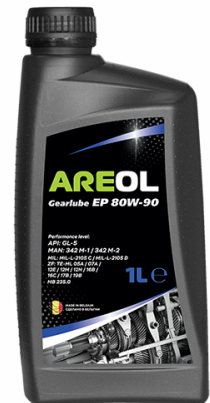

## Features

Frictional properties: easy gear shifting.

Anti-wear protection: long transmission life.

## Specifications:

Density at 15 °C, kg/l	0,893
Viscosity 40 °C, mm <sup>2</sup> /s	150,50
Viscosity 100 °C, mm <sup>2</sup> /s	15,20
Viscosity Index	102
Flash Point COC, °C	214
Pour Point, °C	-27